




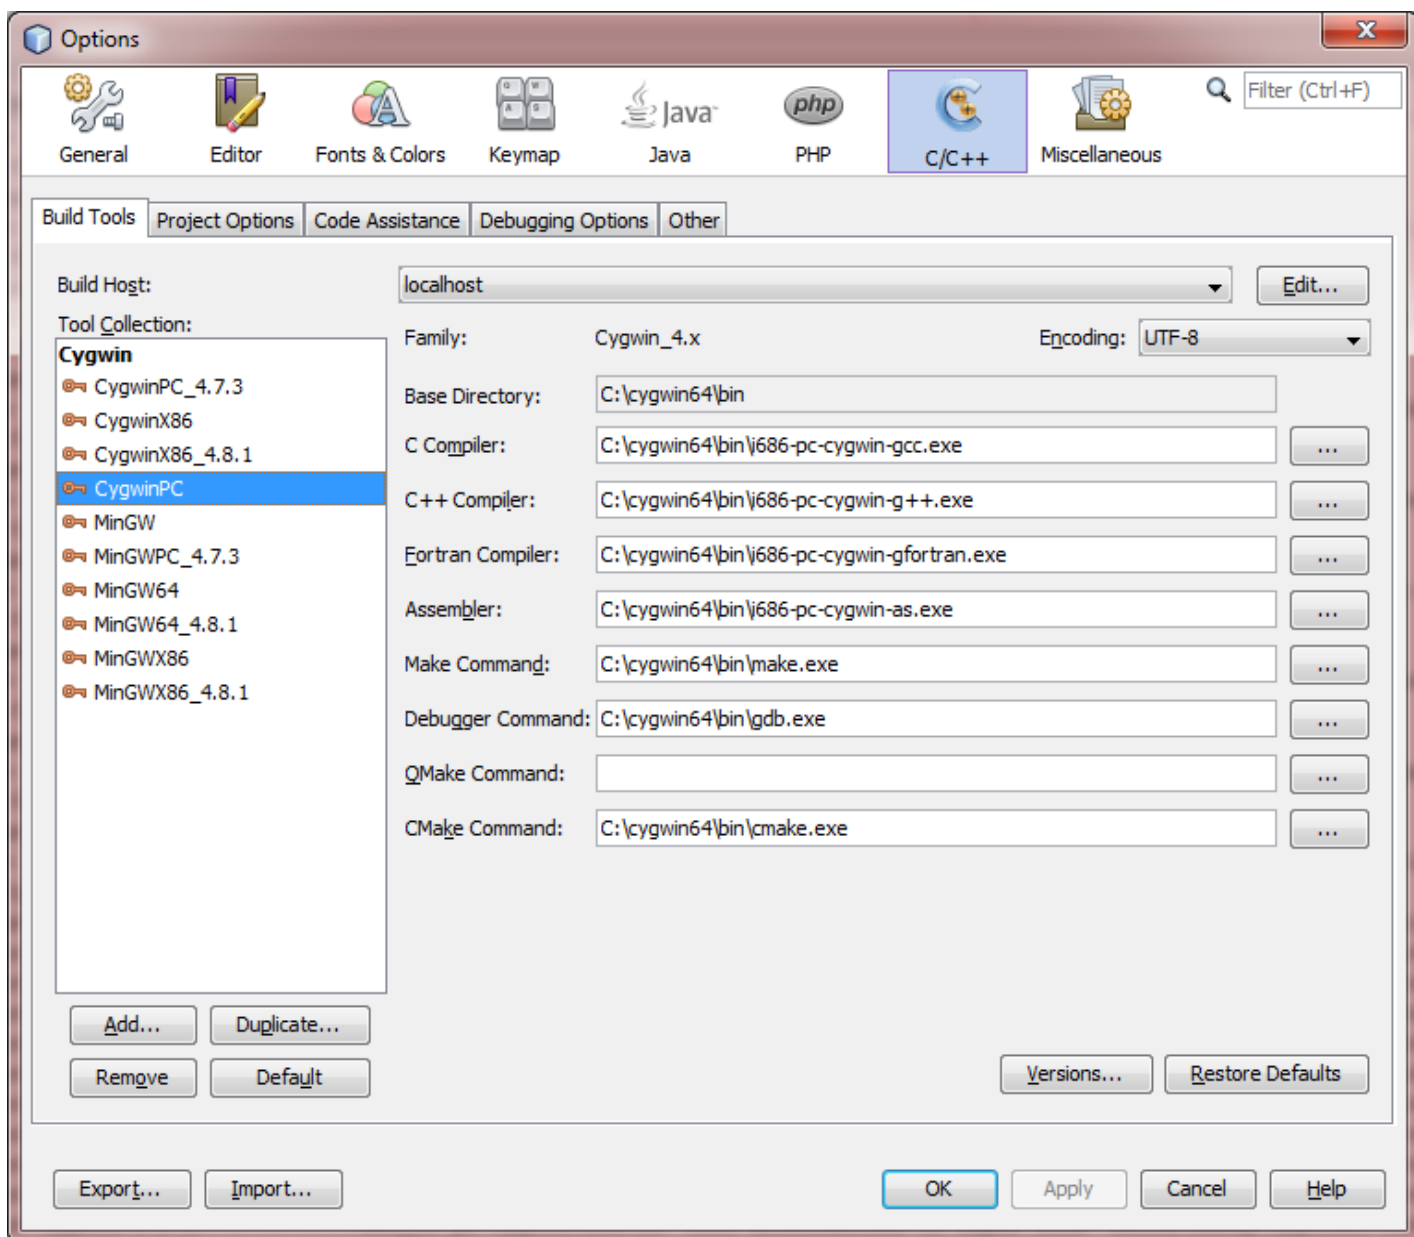

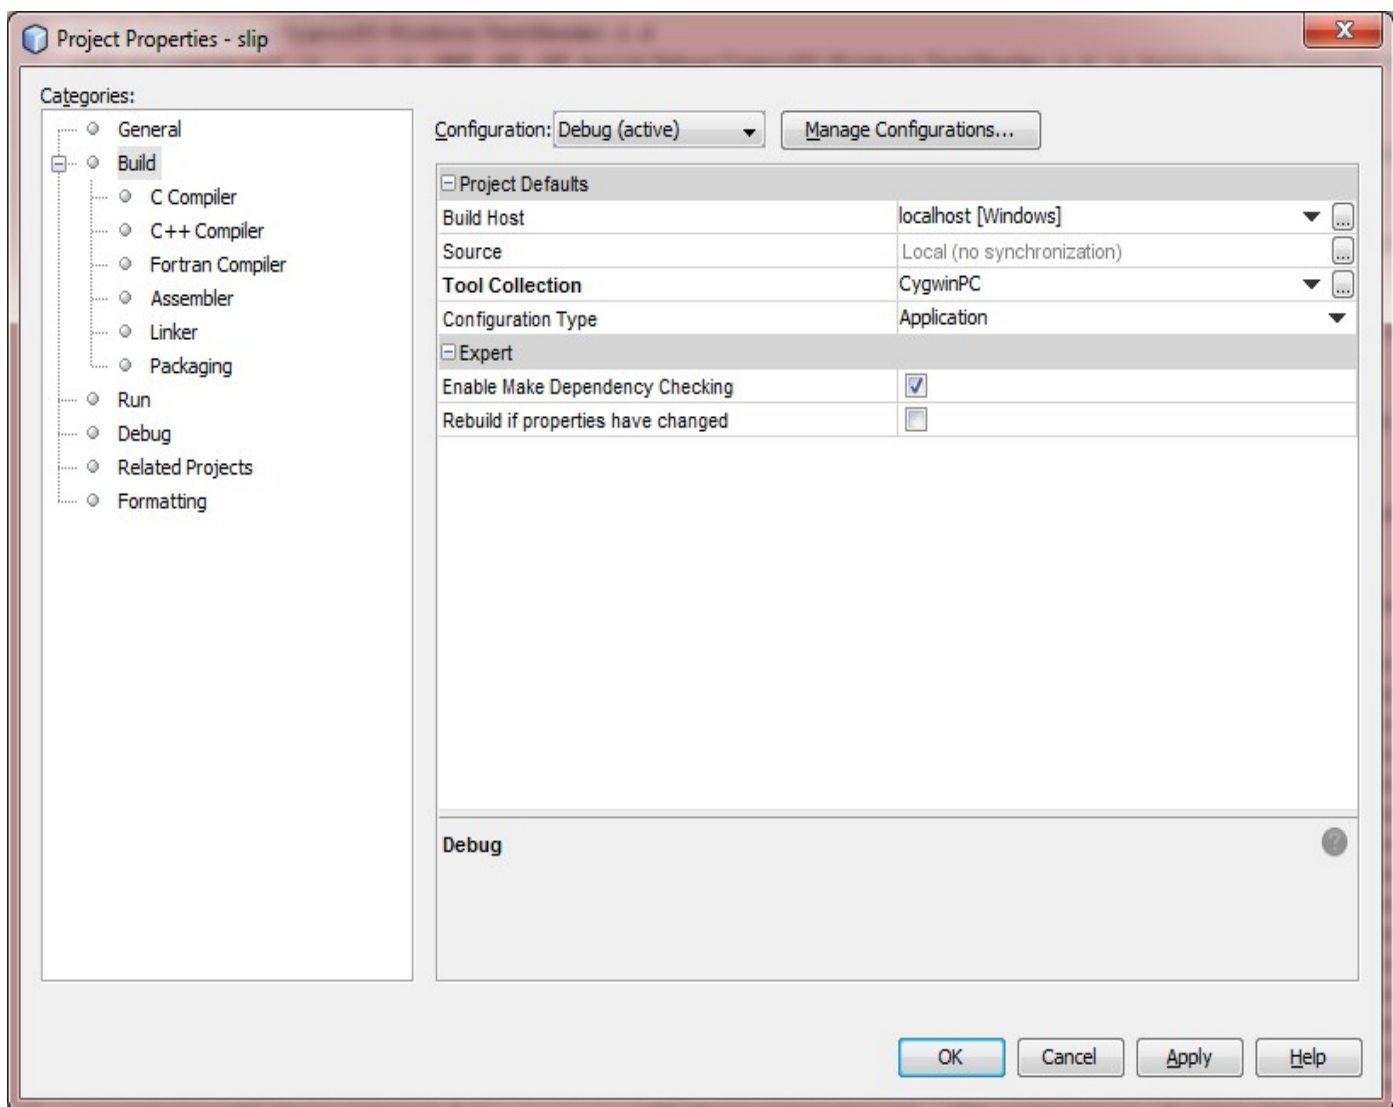

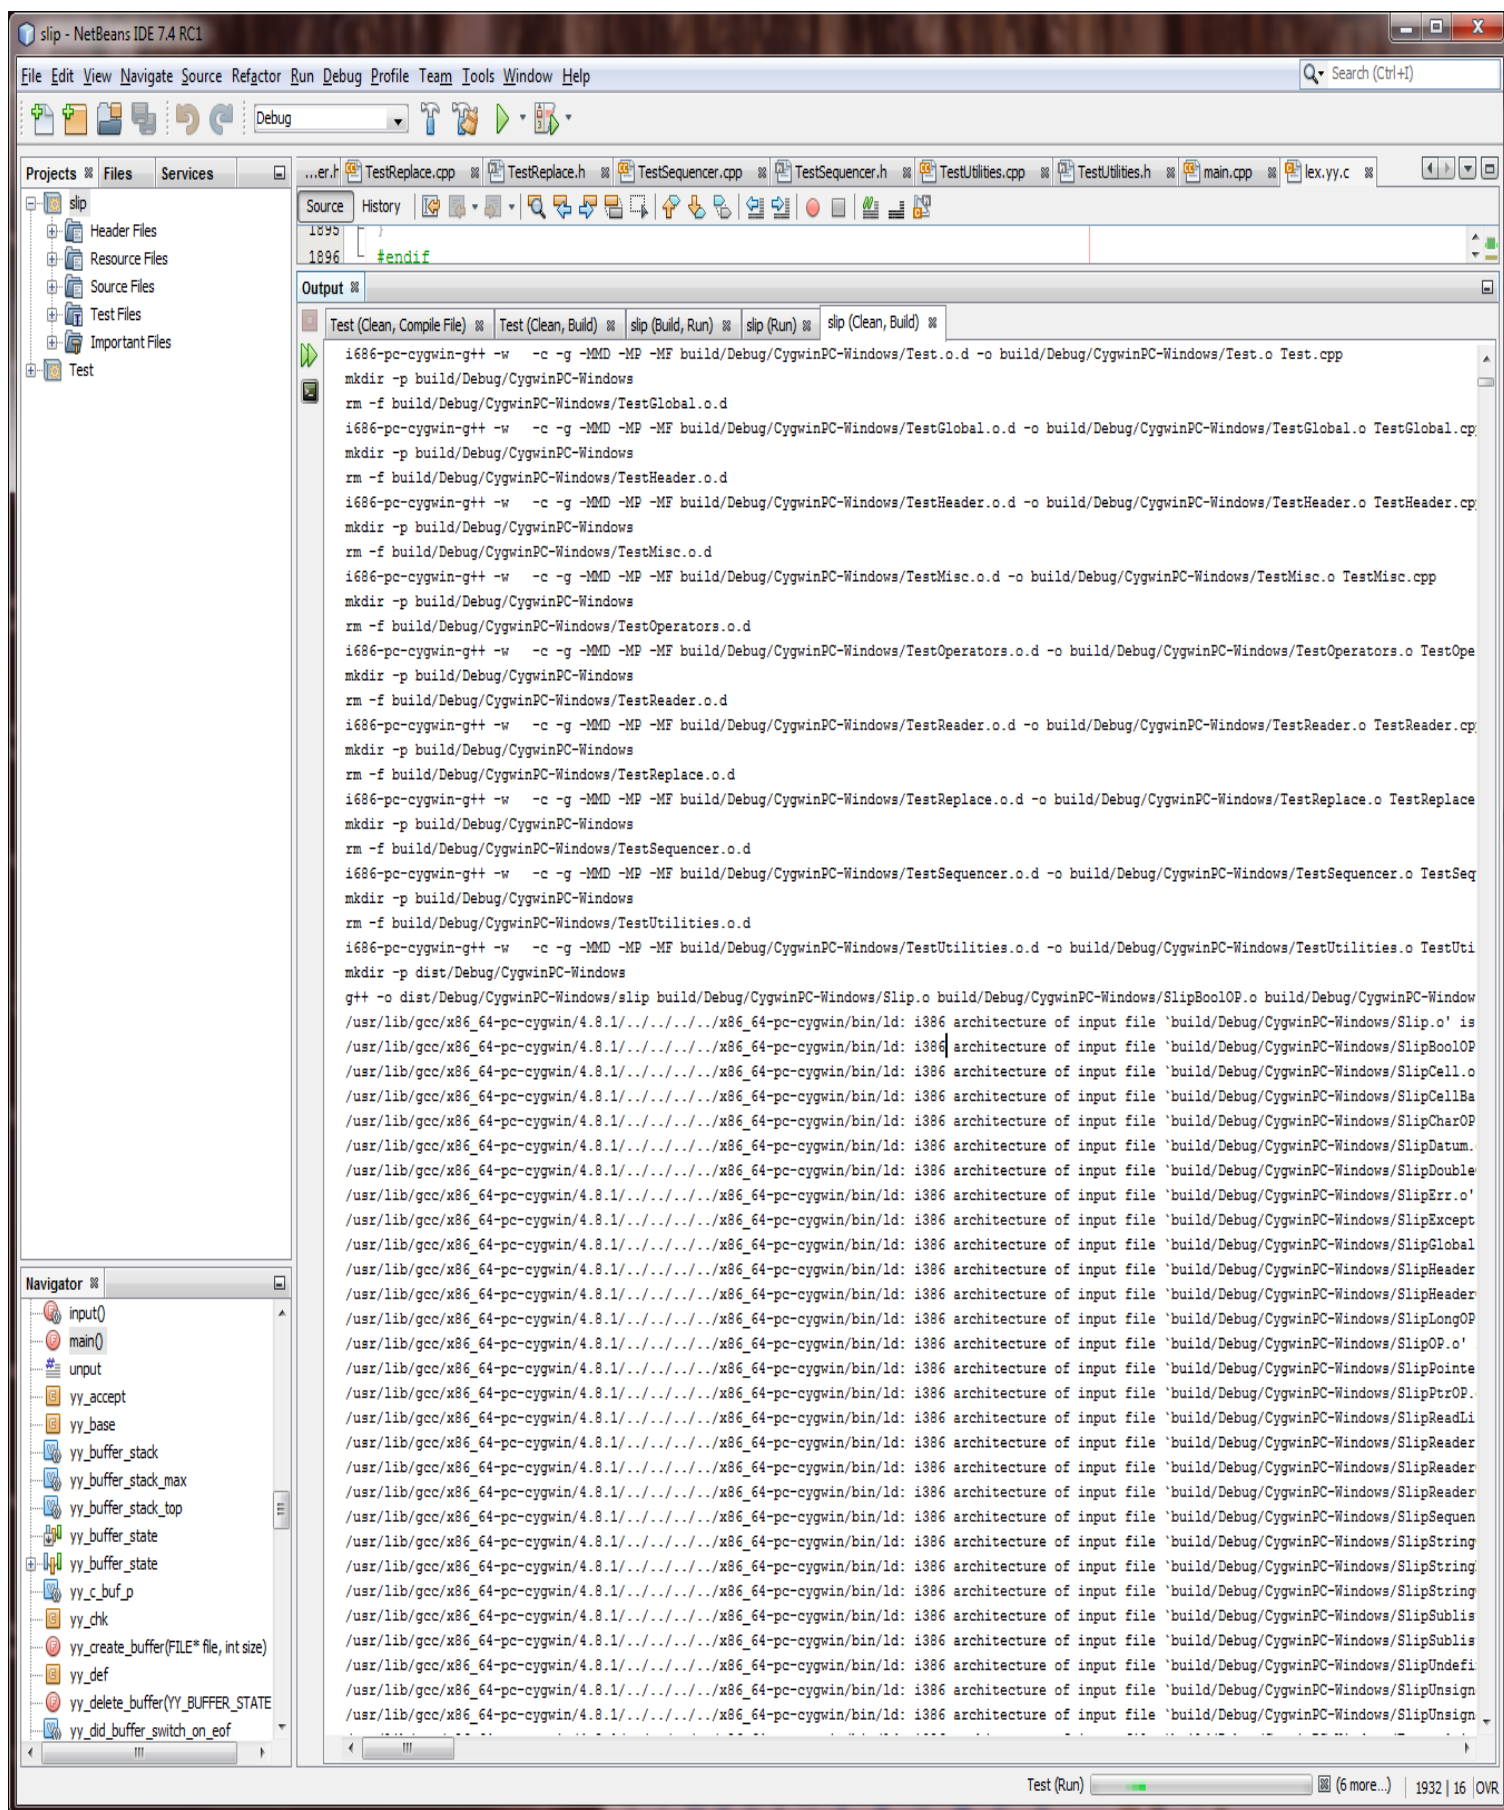

Test - NetBeans IDE 7.4 RC1

File Edit View Navigate Source Refactor Run Debug Profile Team Tools Window Help

Search (Ctrl+I)

Debug

Projects Files Services

TestReplace.cpp TestReplace.h TestSequencer.cpp TestSequencer.h TestUtilities.cpp TestUtilities.h main.cpp lex.yy.c

Source History

```
1886
1887 #ifdef YY_NEED_STRLEN
1888     static int yy_flex_strlen (yyconst char * s )
1889     {
1890         register int n;
1891         for ( n = 0; s[n]; ++n )
1892             ;
1893
1894         return n;
1895     }
1896 #endif
1897
1898 void *yyalloc (yy_size_t size )
1899 {
1900     return (void *) malloc( size );
1901 }
1902
1903 void *yyrealloc (void * ptr, yy_size_t size )
1904 {
1905     /* The cast to (char *) in the following accommodates both
1906      * implementations that use char* generic pointers, and those
1907      * that use void* generic pointers.  It works with the latter
1908      * because both ANSI C and C++ allow castless assignment from
1909      * any pointer type to void*, and deal with argument conversions
1910      * as though doing an assignment.
1911      */
1912     return (void *) realloc( (char *) ptr, size );
1913 }
```

Output

Test (Clean, Compile File) Test (Clean, Build)

```
"/usr/bin/make" -f nbproject/Makefile-Debug.mk QMAKE= SUBPROJECTS= .clean-conf
make[1]: Entering directory '/E/home/skidmarks/Projects/Test/Test'
rm -f build/Debug
rm -f dist/Debug/CygwinPC-Windows/test.exe
make[1]: Leaving directory '/E/home/skidmarks/Projects/Test/Test'

CLEAN SUCCESSFUL (total time: 200ms)

"/usr/bin/make" -f nbproject/Makefile-Debug.mk QMAKE= SUBPROJECTS= .build-conf
make[1]: Entering directory '/E/home/skidmarks/Projects/Test/Test'
"/usr/bin/make" -f nbproject/Makefile-Debug.mk dist/Debug/CygwinPC-Windows/test.exe
make[2]: Entering directory '/E/home/skidmarks/Projects/Test/Test'
mkdir -p build/Debug/CygwinPC-Windows
rm -f build/Debug/CygwinPC-Windows/lex.yy.o.d
i686-pc-cygwin-gcc -c -g -MMD -MP -MF build/Debug/CygwinPC-Windows/lex.yy.o.d -o build/Debug/CygwinPC-Windows/lex.yy.o lex.yy.c
mkdir -p dist/Debug/CygwinPC-Windows
i686-pc-cygwin-gcc -o dist/Debug/CygwinPC-Windows/test build/Debug/CygwinPC-Windows/lex.yy.o
make[2]: Leaving directory '/E/home/skidmarks/Projects/Test/Test'
make[1]: Leaving directory '/E/home/skidmarks/Projects/Test/Test'

BUILD SUCCESSFUL (total time: 550ms)
```

Test (Run) (6 more...) 1932 | 16 | OVR